



OPRAWA DOWNLIGHT LED

LED DOWNLIGHT



DA

LED luminaire - downlight dedicated for recessed ceilings. Wide range of lighting parameters and customization.

DESCRIPTION / BESCHREIBUNG/ DANE OPRAWY

Mounting: in the ceiling.

Housing: aluminium / PC.

Colour: White.

CRI factor [R]: Ra >80 lub Ra >90

Colour of the light [K]: Standard or selection guide

Standard:


W-3000K; D-4000K; C-6500K.

Specjalne:

Meat; Friuts and vegetables; Cheese; Fish; Bread; Dairy;

Alkohol; Wine; Clothes and shoes; Medicine.

DIMENSION / MAßE/ WYMIARY

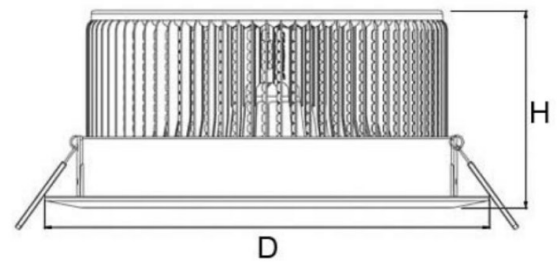


INDEX	L	H
DA07	102mm	66mm
DA24	195mm	105mm
DA36	240mm	106mm



COLOUR [K] / FARBTEMPERATUREN [K] / BARWA [K]

STANDARD




SPECIAL



LINEAR CONECTION SYSTEM / SYSTEM ŁĄCZENIA W LINIE

[A] - 120°

Krzywa rozsyłu / Distribution curve/ Verteilungskurve

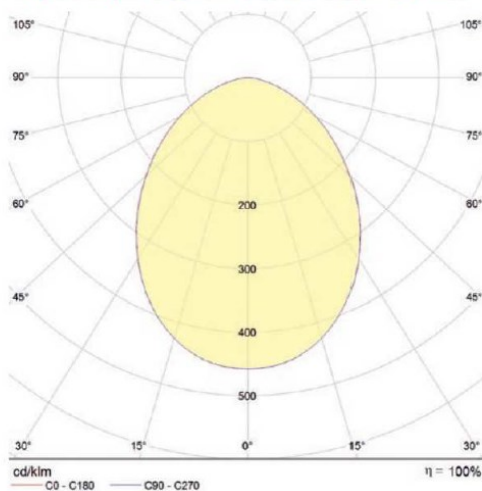

Tolerancja strumienia świetlnego +/- 10%

LIGHTING PARAMETERS

Index	DA			
	Power	K	Flux	R
DA07D	7W	4000K	650 lm	RA>80
DA24D	24W	4000K	2250 lm	RA>80
DA36D	36W	4000K	3635 lm	RA>80

INDEX SYSTEM

