

OPRAWA LED DOWNLIGHT
LED DOWNLIGHT


DKA105

ALU LED IP 44 RoHS CE



DESCRIPTION / BESCHREIBUNG / DANE OPRAWY

	Power / Leistung / Moc	105W
	Flux / Lichtstrom / Strumień	6720 lm
	Beam angle / Abstrahlwinkel / Kąt	12/ 24 / 40°
	CRI	Ra > 80 / Ra > 90
	AC	100-240V
	Control / Steuerung / Sterowanie	ON/OFF
	Optional / Wahlweise / Opcjonalnie	DALI
	Protection / Schutzart / Szczelność	IP 44
	Housing / Gehäuse / Obudowa	aluminium
	Color / Farbe / Kolor	<input type="checkbox"/> white
	Fixing / Montaż	Recessed / Podtynkow

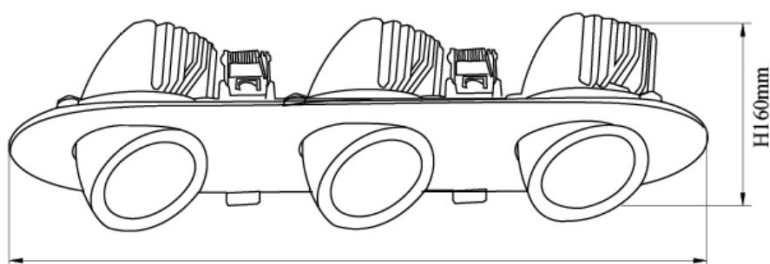

CCT / FARBE / BARWA [K]

STANDARD

V	2700 K
W	3000 K
D	4000 K
A	5000 K
C	6500 K

SPECIAL

ME	FR	CH	FI	BR
DA	AL	WI	CL	MED
GR	GB	GC		



INDEX SYSTEM

	POWER	TEMP	ANGLE	CRI	CONTROL
DKA	105	K	L	R	DALI
		V	L12	R8	OPTIONAL FEATURES WAHLWEISE / OPCJONALNIE
		W	L24	R9	
		D	L40		
		A			
		C			
		SPEC.			

DALI DALI CONTROL
Standard: ON / OFF
Optional / Wahlweise: DALI