




OPRAWY WEWNĘTRZNE
INDOOR LUMINARIES / DECKENLEUCHTEN


PROJEKTOR LED
LED TRACKLIGHT

GAU

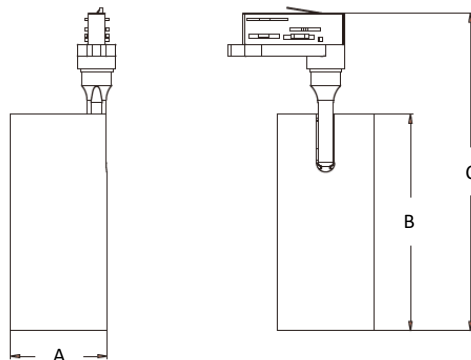

DESCRIPTION / BESCHREIBUNG / DANE OPRAWY

W	Power / Leistung / Moc	15W / 25W
lm	Flux / Lichtstrom / Strumień	1050lm-2250 lm
∠	Beam angle / Abstrahlwinkel / Kąt	15°/24°/30°/45°
☑	CRI	Ra > 80 / Ra > 90
V	AC	100-240V
☑	Control / Steuerung / Sterowanie	ON/OFF
	Optional / Wahlweise / Opcjonalnie	DALI
IP	Protection / Schutzart / Szczelność	IP 40
☑	Housing / Gehäuse / Obudowa	aluminium
☑	Color / Farbe / Kolor	<input type="checkbox"/> White <input type="checkbox"/> Gray <input type="checkbox"/> Black
☑	Fixing / Montaż	On track / W szynoprzewód

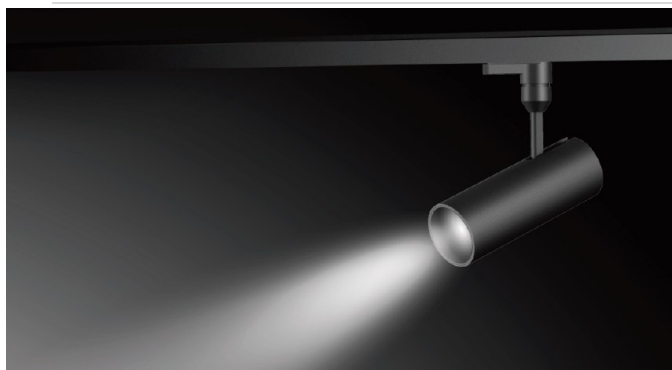

INDEX

INDEX	A	B	C
GAU 15W	60mm	180mm	265mm
GAU 25W	80mm	180mm	265mm

CCT / FARBE / BARWA [K]

W	3000 K
D	4000 K
A	5000 K
B	5700 K

GAU

INDEX	POWER	FLUX	BEAM ANGLE	CRI
INDEKS	LEISTUNG	LICHTSTROM	ABSTRAHLWINKEL	EFFIZIENZ
	MOC	STRUMIEN	KĄT PADANIA	WYDAJNOŚĆ
GAU(C)15(K)(L)R8	15 W	1050-1200lm	15°/24°/30°/45°	Ra min. 80
GAU(C)25(K)(L)R8	25 W	2000-2250lm	15°/24°/30°/45°	Ra min. 80

INDEX SYSTEM

	COLOR	POWER	TEMP	ANGLE	Ra	CONTROL
GAU	C	W	K	L	R8	DALI
<input type="checkbox"/>	W	15	W	L15	R9	OPTIONAL FEATURES WAHLWEISE / OPCJONALNIE
<input type="checkbox"/>	G	25	D	L24		
<input type="checkbox"/>	B		A	L30		
<input type="checkbox"/>			B	L45		

