



Description / Beschreibung / Dane oprawy

Montage: Euroline system, ceiling, track, suspension.


Color[C]: white, silver, black

Control system: ON/OFF, DALI, 1-10V

CRI: Standard Ra >80. Optional Ra >90

Other lengths of luminaires available.

HL - High Lumen - luminaire with increased light efficiency.

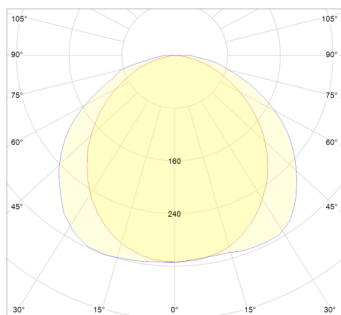

Diffuser [X] / Diffusor [X] / Dyfuzor [X]




LINIA ŚWIETLNA LED

LED LINE

LICHTBAND

SWDI67



Diffuser as a one-piece polycarbonate housing; IP67 protection rating.




Diffusor als einteiliges Polycarbonat-Gehäuse; Schutzart IP67.



Dyfuzor jako jednoczęściowa poliwęglanowa obudowa, klasa szczelności IP67.





Dimension / Maße / Wymiary

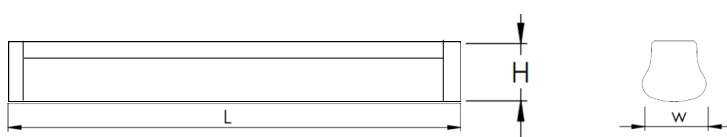


INDEX	L	W	H
SWDDI67 14	1445mm	74mm	75mm
SWDDI67 23	2293mm	74mm	75mm
SWDDI67 28	2885mm	74mm	75mm

Colour [K] / Farbtemperaturen [K] / Barwa [K]


STANDARD



SPECIAL

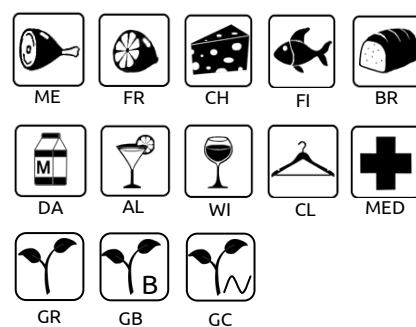

Index system

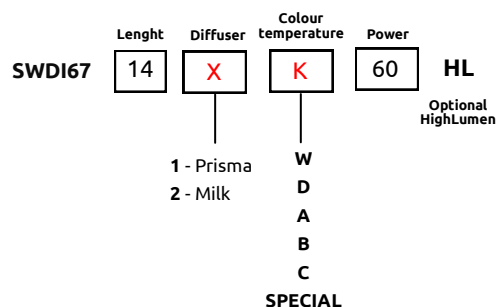

* Standardowe sterowanie: on/off. Opcjonalnie: DALI lub 1-10V
Standard control: on/off. Optional DALI or 1-10V.
Standardsteuerung: on/off. Wahlweise: DALI oder 1-10V.



SWDI67				
Index	Power	Flux (lm)	w/l/h (mm)	lm/w
SWDI67 141D 40	40W	5000	74/1445/75	125
SWDI67 141D 40 HL	40W	6800	74/1445/75	140
SWDI67 141D 50	50W	7000	74/1445/75	120
SWDI67 141D 50 HL	50W	8500	74/1445/75	140
SWDI67 141D 60	60W	8100	74/1445/75	115
SWDI67 141D 60 HL	60W	9900	74/1445/75	135
SWDI67 141D 75	75W	9750	74/1445/75	110
SWDI67 141D 75 HL	75W	12000	74/1445/75	130
SWDI67 231D 90	90W	11250	74/2293/75	115
SWDI67 231D 90 HL	90W	13950	74/2293/75	135
SWDI67 281D 80	80W	13800	74/2885/75	125
SWDI67 281D 80 HL	80W	17400	74/2885/75	140
SWDI67 281D 100	100W	12150	74/2885/75	120
SWDI67 281D 100 HL	100W	14850	74/2885/75	140
SWDI67 281D 120	120W	15600	74/2885/75	115
SWDI67 281D 120 HL	120W	19200	74/2885/75	135

Luminous flux tolerance +/- 5%. Lichtstrom-Toleranz +/- 5%. Tolerancja strumienia świetlnego +/- 5%

